

杭州排浪科技有限公司
Hangzhou Purswave Technology Co., Ltd.

地址(Add): 中国.浙江.杭州余杭区富豪路4号
No. 4, Fuhao Road, Yuhang District, Hangzhou, Zhejiang, China
电话(Tel): 0086-571-88575381
传真(Fax): 0086-571-88575382
邮箱(Email): purswave@yeah.net
网址(Web): www.purswave.cn







杭州排浪科技有限公司坐落于“天堂”杭州，毗邻上海及宁波和港口，交通便利，集研发、生产、销售、出口于一体，致力于新型制冷技术的推广和应用。以自主研发的国家专利产品—外转子结构的直流变频压缩机为基础，我公司开发了太阳能冷柜、车载冰箱、制冰机、陈列柜、移动冷饮车等5大系列100多个型号的相关产品，销往世界各地，目前已攻克1000L以上大型直流冰柜的技术难题，并取得多项国家专利；以超微型直流制冷压缩机为基础，研发了全新结构的移动冷冻冷藏箱并取得国家专利，广泛应用于户外野营、居家旅游、医药储运、冷饮冷冻食品运输等领域。除此之外，我公司还以专业的视角提供制冷系统的匹配、安装方案，为客户定制一些非标制冷设备，如冷水机、冷藏快递柜等。科技创新、勇立潮头！我们会不断进步，为社会提供好产品！

Hangzhou Purewave Technology Co., Ltd is located in Hangzhou, near Shanghai city and Ningbo port, transportation is convenient. We R & D, produce, sale and export product by ourselves, is committed to the promotion and application of DC refrigeration technology, with professional technology and first-class service, serve for society. Based on national patent products – the DC inverter compressor of the outer rotor structure, our company has developed solar freezer, car refrigerator, ice-maker, showcase, etc. 5 series and more than 100 models of similar products are sold to all around the world. And we have solved the technical problems of large DC freezers above 1000L and get a number of national patents. Based on DC Tiny compressor, we developed a new structure of portable refrigerator and have obtained national patents. It can be widely used in outdoor camping, medicine storage cold frozen food transport and other fields. In addition, our company also professionally provides custom made refrigeration systems, such as cold water machine, refrigeration express cabinets, etc. Quality products, intentions of service! We will do our best to supply good products for society!



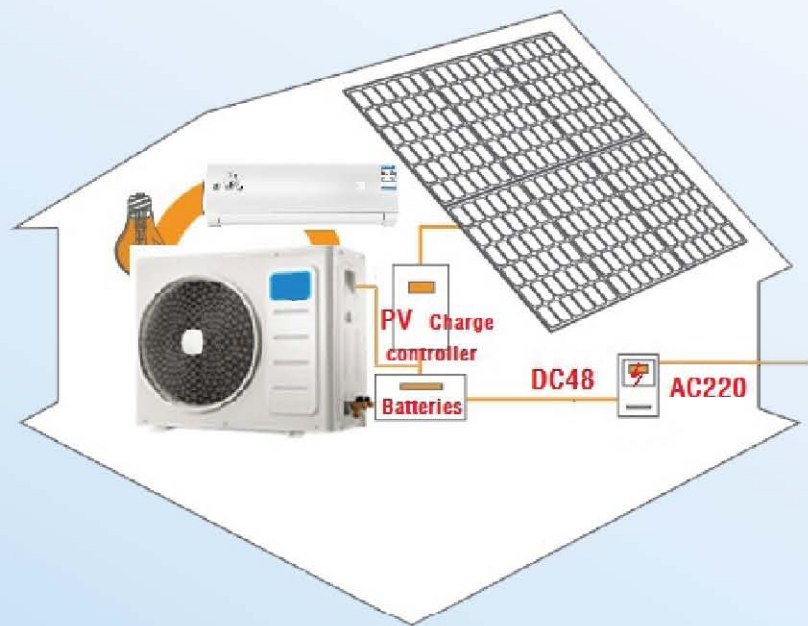

品 名 Product	直流太阳能空调 DC Solar Air-Conditioner	
型 号 Model	1HP	1.5HP
电压/电流/功率 Voltage/Current/Power	48V/13.5A/650W	48V/18.5A/890W
制冷量 Cooling Capacity	2650W / 9000 Btu/h	3500W / 12000 Btu/h
应用房间面积 Applicable Indoor area	10~15m²	15~24m²
内机/外机尺寸 Indoor/Outdoor Dimension	800x290x193mm / 720x540x260mm	800x290x193mm / 720x540x260mm
内机/外机重量 Indoor/Outdoor Weight	9/30 KG	11/33 KG
内机/外机包装尺寸 Indoor/Outdoor Package Dimension	890x380x290mm / 840x360x605mm/ 0.28m³	890x380x290mm / 840x360x605mm/ 0.28m³
内机/外机噪音 Indoor/Outdoor Noise	22-40 (dB (A)) / ≤49 (dB (A))	22-40 (dB (A)) / ≤49 (dB (A))
工作环境温度 Working Ambient Temperature	16-60 °C	16-60 °C
运行时间 Operating Time	12h	12h
12V 电池组 12V Battery Units	4x150AH	4x200AH
太阳能板组件 Solar Panel Units	6x250W	6x250W
太阳能控制器 Solar Controller	50A 48V	50A 48V
交流适配器 Adapter	48V 200-240V 50/60Hz 1000W	

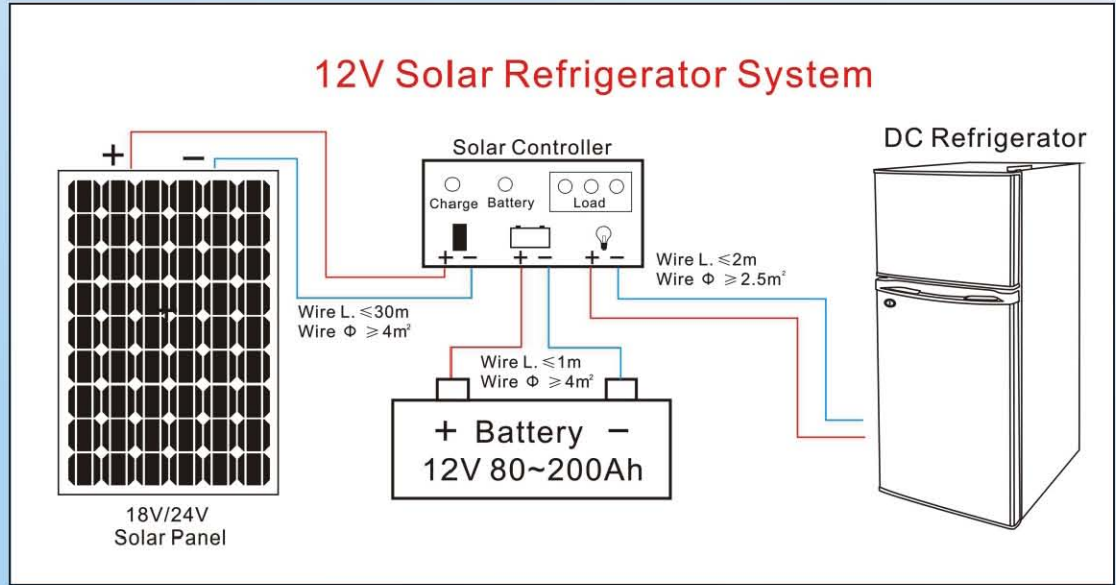

冷藏温度: -5~10°C
直流供电: 12V 24V 36V 48V 72V
环保冷媒: R134a
创新型抗震压缩机
创新型高效散热方式



单独冷冻盒
Freezing
Box




门锁
Lock

Cooling Temperature: -5~10°C
DC Powered: 12V 24V 36V 48V 72V
Environmental Friendly Refrigerant: R134a
Innovative Type Anti-vibration Compressor
Innovative High Efficiency Heat Dissipation Mode



机械温控
Manual
Thermostat



颜色
Color



型 号 Model	容 量 Capacity		功率 Power (W)	产品尺寸 Product Dimension (WxDxH, MM)	包装尺寸 Packing Dimension (WxDxH, MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
	Liters	Cu. Ft						20'	40'	40'HQ
BC-50	50	1.77	40	450x465x490	465x510x510	13	15	220	460	580
BC-50A	50	1.77	40	450x450x510	495x465x530	13	15	220	460	580
BC-68	68	2.40	40	450x450x590	470x480x610	14	16	220	460	580
BC-70A	70	2.47	45	470x450x630	520x470x660	16	18	165	345	459
BC-70	70	2.47	50	450x445x680	470x480x700	17	19	165	345	458
BC-86	86	3.04	55	450x450x720	470x480x740	18	20	165	345	458
BC-90	90	3.18	60	450x450x830	470x480x850	19	21	131	261	374
BC-95	95	3.35	65	470x450x850	520x480x870	20	22	110	220	338

冷冻温度: -18°C
直流供电: 12V 24V 36V 48V 72V
环保冷媒: R134a
创新型抗震压缩机
创新型高效散热方式



机械温控
Manual
Thermostat



门锁
Lock

Freezing Temperature: -18°C
DC Powered: 12V 24V 36V 48V 72V
Environmental Friendly Refrigerant: R134a
Innovative Type Anti-vibration Compressor
Innovative High Efficiency Heat Dissipation Mode



加厚保温层
60MM Foann



颜色
Color



型 号 Model	容 量 Capacity		功率 Power (W)	产品尺寸 Product Dimension (WxDxH, MM)	包装尺寸 Packing Dimension (WxDxH, MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
	Liters	Cu. Ft						20'	40'	40'HQ
BD-40	40	1.41	50	470x450x510	520x510x530	14	16	220	460	560
BD-60	60	2.12	60	470x450x630	520x510x665	17	19	165	345	459
BD-70	70	2.47	70	450x460x640	510x520x670	17	19	165	345	459
BD-90	90	3.18	70	470x460x860	520x510x875	28	30	121	250	293
BD-100	100	3.53	80	505x525x850	570x575x885	30	32	84	168	251
BD-110	110	3.88	90	545x555x850	585x595x885	31	35	80	160	236

储藏温度：冷冻 -18℃；冷藏 -5~10℃
直流供电：12V 24V 36V 48V 72V
环保冷媒：R134a
创新型抗震压缩机
创新型高效散热方式

Temperature: Freezer -18℃; Cooler -5~10℃
DC Powered: 12V 24V 36V 48V 72V
Environmental Friendly Refrigerant: R134a
Innovative Type Anti-vibration Compressor
Innovative High Efficiency Heat Dissipation Mode




灯
Light



门锁
Lock



机械温控
Manual
Thermostat



颜色
Color



型 号 Model	容 量 Capacity		功率 Power (W)	产品尺寸 Product Dimension (WxDxH, MM)	包装尺寸 Packing Dimension (WxDxH, MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
	Liters	Cu. Ft						20'	40'	40'HQ
BCD-98A	98	3.46	70	475x525x850	520x575x880	24	25	110	220	358
BCD-98	98	3.46	70	450x445x860	465x475x880	24	26	110	220	358
BCD-108	108	3.81	80	455x515x1030	505x570x1045	29	32	110	220	220
BCD-118	118	4.17	85	455x515x1205	505x570x1220	32	35	110	220	220
BCD-128	128	4.52	90	455x515x1280	465x540x1300	34	37	110	220	220
BCD-138A	138	4.87	95	475x525x1218	520x575x1270	35	38	80	160	160
BCD-138	138	4.87	95	455x515x1325	505x570x1350	35	38	80	160	160

储藏温度：冷冻 -18℃；冷藏 -5~10℃
直流供电：12V 24V 36V 48V 72V
环保冷媒：R134a
创新型抗震压缩机
创新型高效散热方式

Temperature: Freezer -18℃; Cooler -5~10℃
DC Powered: 12V 24V 36V 48V 72V
Environmental Friendly Refrigerant: R134a
Innovative Type Anti-vibration Compressor
Innovative High Efficiency Heat Dissipation Mode




灯
Light



门锁
Lock



机械温控
Manual
Thermostat



颜色
Color



型 号 Model	容 量 Capacity		功率 Power (W)	产品尺寸 Product Dimension (WxDxH, MM)	包装尺寸 Packing Dimension (WxDxH, MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
	Liters	Cu. Ft						20'	40'	40'HQ
BCD-150	150	5.30	100	475x530x1230	520x575x1250	38	41	46	92	184
BCD-158	158	5.58	105	455x555x1360	525x595x1410	40	43	46	92	150
BCD-168	168	5.93	110	500x540x1390	570x580x1415	43	48	46	92	150
BCD-178	178	6.29	115	500x580x1405	570x620x1430	45	50	45	90	132

储藏温度: 单温冷冻-18℃;
双温冷冻冷藏 -18℃; 冷藏 -5~10℃
直流供电: 12V 24V 36V 48V 72V
环保冷媒: R134a
创新型抗震压缩机
创新型高效散热方式

Temperature: Single Temperature -18℃;
Double Temperature -18℃; Cooling -5~10℃
DC Powered: 12V 24V 36V 48V 72V
Environmental Friendly Refrigerant: R134a
Innovative Type Anti-vibration Compressor
Innovative High Efficiency Heat Dissipation Mode



电子温控
Electronic
Thermostat



搬运把手
Carry Handle



机械温控
Manual
Thermostat



门锁
Lock



型号 Model	容量 Capacity (L)	功率Power (W)	产品尺寸 Product Dimension (MM)	包装尺寸 Packing Dimension (MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
							20'	40'	40' HQ
BD/BC-32	32	45	550x445x377	595x505x457	15	17	220	460	574
BD/BC-42	42	50	550x445x452	595x505x532	17	19	220	460	574
BD/BC-62	62	55	520x500x595	560x570x640	21	23	165	345	460
BD/BC-68	68	55	625x485x525	677x547x570	22	24	133	275	322
BD/BC-100	100	65	520x500x785	560x570x830	23	25	95	190	220



型号 Model	容量 Capacity (L)	功率Power (W)	产品尺寸 Product Dimension (MM)	包装尺寸 Packing Dimension (MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
							20'	40'	40' HQ
BCD-118	118	75	820x485x635	860x555x680	24	26	74	154	180
BCD-138	138	85	820x485x785	860x555x830	26	28	71	146	172

储藏温度: 单温冷冻 -18℃;
直流供电: 12V 24V 36V 48V 72V
环保冷媒: R134a
创新型抗震压缩机
创新型高效散热方式

Temperature: Single Temperature -18℃;
DC Powered: 12V 24V 36V 48V 72V
Environmental Friendly Refrigerant: R134a
Innovative Type Anti-vibration Compressor
Innovative High Efficiency Heat Dissipation Mode



脚轮
Wheel



机械温控
Manual
Thermostat




电源线
Wire



型号 Model	容量 Capacity (L)	功率Power (W)	产品尺寸 Product Dimension (MM)	包装尺寸 Packing Dimension (MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
							20'	40'	40' HQ
WR/WF-100	100	65	530x550x840	580x585x880	30	33	94	194	228
WR/WF-108	108	65	625x525x900	675x575x950	30	33	76	157	203
WR/WF-158	158	75	815x525x900	865x575x950	35	38	59	123	156
WR/WF-178	178	85	955x520x910	1005x570x960	40	43	51	106	120
WR/WF-218	218	105	1070x550x890	1120x600x940	52	56	44	92	108
WR/WF-278	278	125	1265x595x900	1315x645x950	57	60	35	72	82
WR/WF-400	400	180	1380x800x795	1440x880x870	74	84	25	53	67
WR/WF-500	500	220	1580x800x795	1640x880x870	74	84	25	53	67
WR/WF-800	800	260	1852x800x858	1930x880x910	95	118	18	38	45
WR/WF-900	900	280	2052x800x858	2130x880x910	105	128	16	34	38
WR/WF-1000	1000	320	2052x800x858	2330x880x910	115	138	15	31	26

储藏温度:冷冻 -18℃; 冷藏 -5~10℃
直流供电:12V 24V 36V 48V 72V
环保冷媒:R134a
创新型抗震压缩机
创新型高效散热方式

Temperature: Freezer -18℃; Cooler -5~10℃
DC Powered: 12V 24V 36V 48V 72V
Environmental Friendly Refrigerant: R134a
Innovative Type Anti-vibration Compressor
Innovative High Efficiency Heat Dissipation Mode



双温双室
Double Room



机械温控
Manual
Thermostat



脚轮
Wheel



电源线
Wire




型号 Model	容量 Capacity (L)	功率Power (W)	产品尺寸 Product Dimension (MM)	包装尺寸 Packing Dimension (MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
							20'	40'	40' HQ
WRF-188	188	105	1070x550x850	1120x600x900	46	51	46	96	120
WRF-218	218	115	1180x565x805	1260x660x880	48	53	38	79	83
WRF-268	268	155	1265x595x930	1315x645x980	56	60	34	70	82

储藏温度:单温冷冻 -18℃;
直流供电:12V 24V 36V 48V 72V
环保冷媒:R134a
创新型抗震压缩机
创新型高效散热方式

Temperature:Single Temperature -18℃;
DC Powered: 12V 24V 36V 48V 72V
Environmental Friendly Refrigerant: R134a
Innovative Type Anti-vibration Compressor
Innovative High Efficiency Heat Dissipation Mode



机械温控
Manual
Thermostat



玻璃移门
Glass
Sliding Door



脚轮
Wheel



电源线
Wire



型号 Model	容量 Capacity (L)	功率Power (W)	产品尺寸 Product Dimension (MM)	包装尺寸 Packing Dimension (MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
							20'	40'	40' HQ
SD/SC-168	168	105	710x620x780	790x680x880	39	43	59	123	144
SD/SC-188	188	116	1050x550x815	1130x630x910	41	45	43	90	128
SD/SC-218	218	135	1210x555x815	1290x630x910	47	52	38	78	108
SD/SC-258	258	165	1233x623x790	1285x692x860	60	65	37	76	96

储藏温度: 冷藏-5~10℃
直流供电: 12V 24V 36V 48V 72V
环保冷媒: R134a
创新型抗震压缩机
创新型高效散热方式

Cooling Temperature: -5~10℃
DC Powered: 12V 24V 36V 48V 72V
Environmental Friendly Refrigerant: R134a
Innovative Type Anti-vibration Compressor
Innovative High Efficiency Heat Dissipation Mode



机械温控
Manual
Thermostat



玻璃门
Glass Door



电源线
Wire



型号 Model	容量 Capacity (L)	功率 Power (W)	产品尺寸 Product Dimension (MM)	包装尺寸 Packing Dimension (MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
							20'	40'	40' HQ
SC-21	21	45	330x410x472	371x451x513	15	17	326	620	792
SC-52	52	50	435x495x510	469x526x539	19	21	211	400	511
SC-70	70	55	435x500x695	469x526x725	24	26	156	300	380
SC-98	98	60	480x460x852	562x552x887	31	34	101	168	246

储藏温度: 冷藏5~10℃
直流供电: 12V 24V 36V 48V 72V
环保冷媒: R134a
创新型抗震压缩机
创新型高效散热方式

Cooling Temperature: 5~10℃
DC Powered: 12V 24V 36V 48V 72V
Environmental Friendly Refrigerant: R134a
Innovative Type Anti-vibration Compressor
Innovative High Efficiency Heat Dissipation Mode



电子温控
Electronic
Thermostat



机械温控
Manual
Thermostat



脚轮
Wheel



电源线
Wire



型号 Model	功率 Power (W)	产品尺寸 Product Dimension (MM)	包装尺寸 Packing Dimension (MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
						20'	40'	40' HQ
ZH900	150	900x650x1170	1000x750x1270	150	160	29	61	71
ZH1200	180	1200x650x1170	1300x750x1270	180	190	29	61	71
ZH1500	250	1500x650x1170	1600x750x1270	200	210	29	61	71
ZH1800	300	1800x650x1170	1900x750x1270	250	260	29	61	71


储藏温度: $-18\sim 10^{\circ}\text{C}$
直流供电: 12V 24V 36V 48V 72V
环保冷媒: R134a
创新型抗震压缩机
创新型高效散热方式



汽车点烟器插线
Wire for Car



220V/110V适配器
220V/110V Adaptor



颜色
Color



电源线
Wire

Cooling Temperature: $-18\sim 10^{\circ}\text{C}$
DC Powered: 12V 24V 36V 48V 72V
Environmental Friendly Refrigerant: R134a
Innovative Type Anti-vibration Compressor
Innovative High Efficiency Heat Dissipation Mode




型号 Model	容量 Capacity (L)	功率 Power (W)	产品尺寸 Product Dimension (MM)	包装尺寸 Packing Dimension (MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
							20'	40'	40'HQ
B-18D	18	45	390x390x405	430x450x460	12	13	314	651	763



型号 Model	容量 Capacity (L)	功率 Power (W)	产品尺寸 Product Dimension (MM)	包装尺寸 Packing Dimension (MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
							20'	40'	40'HQ
A-25D	25	50	575x363x331	639x424x416	14	15	248	515	603
A-30D	30	55	575x363x369	639x424x454	16	17	228	472	553
A-40D	40	60	575x363x444	639x424x529	18	19	195	405	474
A-50D	50	65	575x363x519	639x424x604	20	21	171	354	416

高效压缩机制冷
子弹头圆冰设计
S\M\L 大小冰块可选
环保冷媒: R134a



微电脑控制
Micro-Computer Control



食品级不锈钢
Stainless Steel for Food

High Efficiency Compressor
Ice Shape: Bullet
Ice Cube Sizes: S\M\L



储冰室
Electronic Thermostat



电源线
Wire

Environmental Friendly Refrigerant: R134a



型号 Model	制冰量 Ice Capacity (KG/12H)	功率Power (W)	产品尺寸 Product Dimension (MM)	包装尺寸 Packing Dimension (MM)	净重 Net Weight (KG)	毛重 Gross Weight (KG)	装柜数量 Container Loading (PCS)		
							20'	40'	40'HQ
SK-12	12	75	300x350x370	350x400x430	11	12	459	951	1115
SK-15	15	85	300x350x370	350x400x430	11	13	459	951	1115